

### Model No.:FTB-24G-1

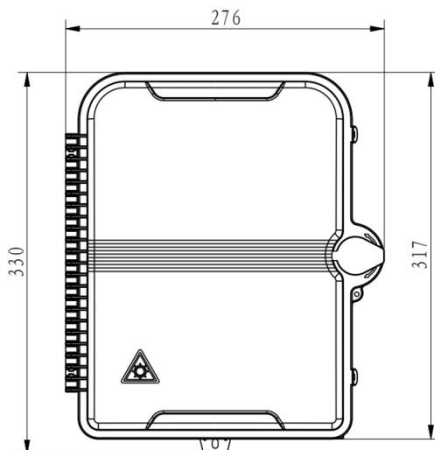
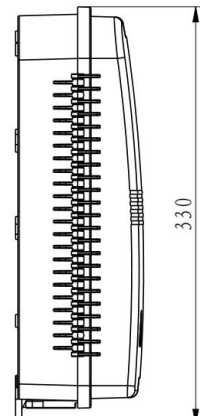
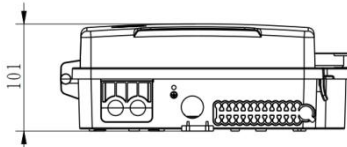
## 1 Overview

YIPU Model No. FTB-24G-1 can connect the drop cable with feeder cable as the termination point in the Fttx network, which is cable to meet at least 24 users requirements. It can help splicing, splitting, storage and management with suitable space.

## 2 Technical Index

|                            |                   |                                    |                                    |
|----------------------------|-------------------|------------------------------------|------------------------------------|
| <b>Model No.</b>           | FTB-24G-1         | <b>Color</b>                       | Black, Grey White..                |
| <b>Capacity</b>            | 16cores & 24cores | <b>Protection Level</b>            | IP55                               |
| <b>Material</b>            | PC+ABS, ABS       | <b>Flame retardant performance</b> | Non-flame retardant                |
| <b>Dimension(L*W*D,MM)</b> | 320*270*110       | <b>Splitter</b>                    | Can be with tube & module splitter |

The dimension diagram:(mm)

|                                                                                     |                                                                                     |                                                                                       |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  |  |  |
| <b>Pic#1: Top View</b>                                                              | <b>Pic#2: Side View</b>                                                             | <b>Pic#3: Front View</b>                                                              |

## 3 Features

- 3.1 The body is made of high quality engineering plastic with good strength;
- 3.2 With safe special-shaped lock, the box can be opened easily and has good water-proof performance, suitable for indoor and outdoor natural

## HANGZHOU HI LINK ELECTRONICS CO.,LTD

### The Datasheet of Fiber Optical Terminal Box

environments (Pic#1 for details);

3.3 With double-page design, the box can be installed and maintained easily,  
the fusion and termination are completely separated( Pic#2 for details);

**Pictures for reference:**

**For 3.2**



**Pic#1**

**For 3.3**



**Pic#2**

## 4 Package Information

4.1 Plastic bag size: 500\*410mm

4.2 Inner box with single corrugated size: 325\*275\*115mm

4.3 Carton with double corrugated size: 590\*335\*565mm(10PCS/Box)

4.4 Weight per carton: 15KG