


GYTZA

Loose Tube Layer Stranded Non-armored Flame-retardant Optical Cable

- ① Optical fiber ③ Loose tube ⑤ Core filling material ⑦ Polyethylene sheath
② Tube filling material ④ Central strength member ⑥ Coated steel tape

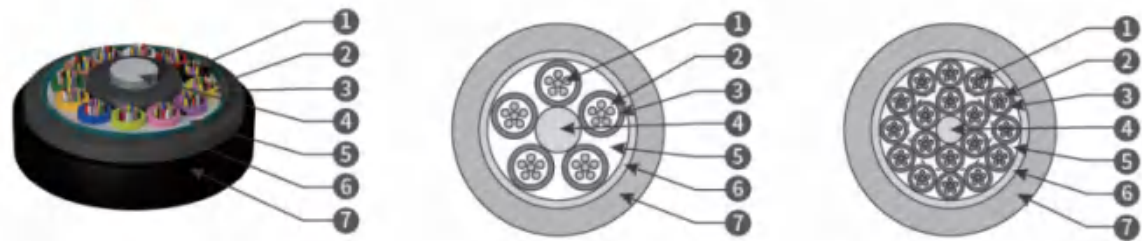

Product Description

Colored optical fibers are placed in a loose tube made of high-modulus material, filled with thixotropic gel. The center of the cable core is a metal strength member. The loose tube (and filling rope) is twisted around the central strength member to form a circular cable core, with the interstices of the cable core filled with water-blocking gel. The cable is then extruded with a flame-retardant sheath after longitudinally wrapping with coated aluminum tape.

Product Features

The material of the loose tube itself has good resistance to hydrolysis and high strength.

- ◆ Filling the tube with thixotropic gel provides critical sealing
- ◆ Special sheath material has excellent flame retardancy.
- ◆ A single steel wire central strength member contributes to the parallelism and tensile strength of the optical cable.
- ◆ Possesses good mechanical performance and temperature characteristics.
- ◆ Coated aluminum tape moisture-proof layer.



Optical Characteristics

Fiber Type	Attenuation (+20°C)				Bandwidth		Numerical Aperture	Cable Cut-off Wavelength
	@850nm	@1300nm	@1310nm	@1550nm	@850nm	@1300nm		
G.652	-	-	≤0.36db/km	≤0.22db/km	-	-	-	≤1260nm
G.655	-	-	≤0.40db/km	≤0.23db/km	-	-	-	≤1450nm
50/125μm	≤3.3db/km	≤1.2db/km	-	-	≥500MHz·km	≥500MHz·km	0.200±0.015NA	-
62.5/125μm	≤3.5db/km	≤1.2db/km	-	-	≥200MHz·km	≥500MHz·km	0.275±0.015NS	-

Structural Parameters

Cable Model (increments by 2 fibers)	Number of Fibers	Number of Loose Tubes	Number of Filling Ropes	Reference Cable Weight (kg/km)	Allowable Tensile Force Long-term/Short-term (N)	Allowable Crush Force Long-term/Short-term (N)	Bending Radius Static/Dynamic (mm)
GYTA-2~6Xn	2~6	1	4	101	600/1500	300/1000	10D/20D
GYTA-8~12Xn	8~12	2	3	101			
GYTA-14~18Xn	14~18	3	2	101			
GYTA-20~24Xn	20~24	4	1	101			
GYTA-26~30Xn	26~30	5	0	101			
GYTA-32~36Xn	32~36	6	0	111			
GYTA-38~48Xn	38~48	4	1	117			
GYTA-50~60Xn	50~60	5	0	117			
GYTA-62~72Xn	62~72	6	0	144			
GYTA-74~84Xn	74~84	7	1	171			
GYTA-86~96Xn	86~96	8	0	171			
GYTA-98~108Xn	98~108	9	1	198			
GYTA-110~120Xn	110~120	10	0	198			
GYTA-122~132Xn	122~132	11	1	229			
GYTA-134~144Xn	134~144	12	0	229			
GYTA-146~216Xn	146~216	13-18	5-0	229			

Storage and Operating Temperature: -40°C to +70°C.

Application: Ducts, Aerial

Note:

- The suffix Xn in the model indicates the selected fiber type, see Yangtze Fiber Model Explanation for details.
- The color arrangement of the loose tube and fibers can be found in the chromatogram.
- The minimum thickness of the polyethylene sheath is 1.5mm.

- The cable should not be stored in open-air environments for more than 6 months, otherwise the spool may be damaged.
- This document is for reference only and cannot be used as an attachment to the contract. For detailed product information, please contact our sales staff.