

Model No.:SC-D144-03


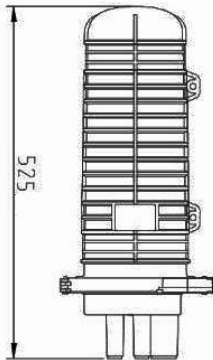
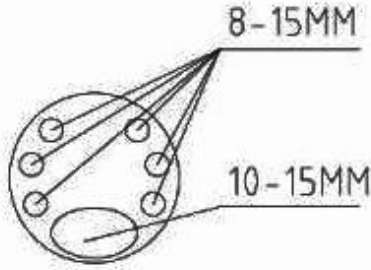
1 Overview

YIPU Model No. SC-D144-03 is one of the main equipment for user access points, applied for protective connection and distribution between two or more cables. The primary function is to connect distribution cable and indoor cable in the open air. It's widely used in communication systems, cable TV, optical cable network systems and others by virtue of steady structure, good sealing performance and easy construction.

2 Technical Index

Model No.	SC-D144-03	Color	Black
Capacity	144 cores	Protection Level	IP68
Material	PP	Inlet/outlet	1+6
Dimension(MM)	525* Φ 225	Sealing Method For Inlets	Heat shrinkable
Inlet cable port	Φ 10- Φ 15	Outlet cable port	Φ 8- Φ 15

The dimension diagram:(mm)

		
Pic#1: Top View	Pic#2: Front View	Pic#3: Bottom View

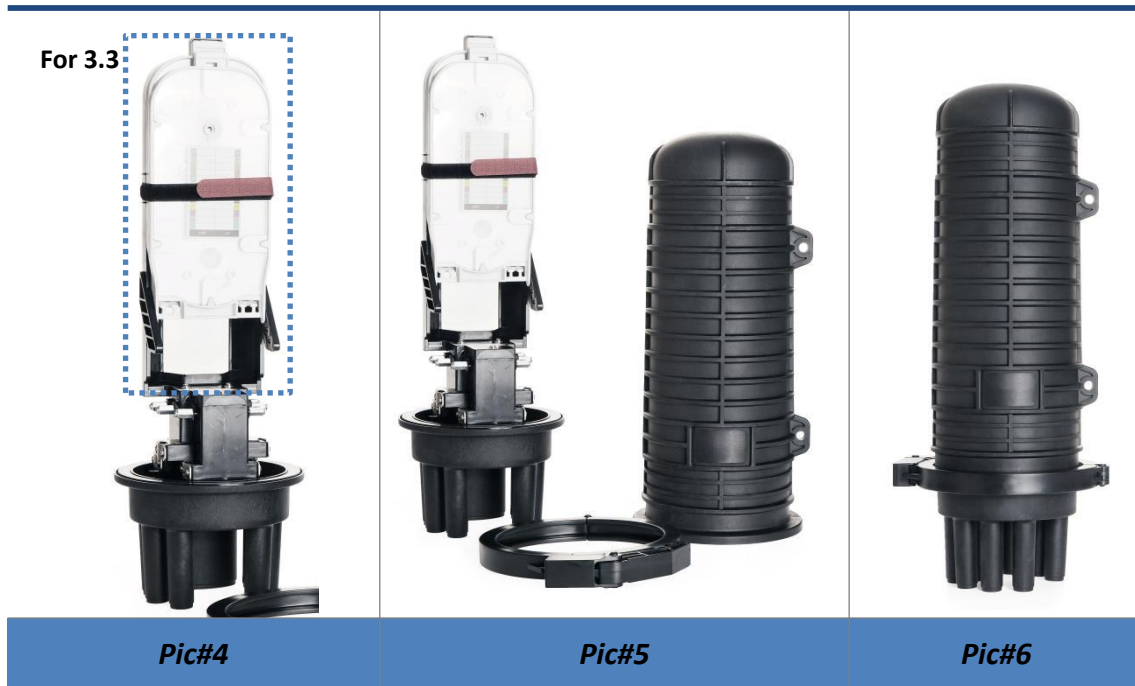
3 Features

- 3.1 The body is made of high quality engineering plastic with good strength;
- 3.2 With good waterproof design, the fiber optical splice closure can be applied into underground and aerial;
- 3.3 Six branch cable ports for Φ 8-15mm; one un-cutting port for Φ 10-15mm;
- 3.4 Capacity: 36-144C. 36F for each tray;

3.5 Can be used for ribbon optical cable with a capacity of 432 cores;

3.6 Mechanical seal for the box, and heat shrink seal for cable ports. Good sealing performance;

Pictures for reference:



4 Package Information

4.1 Plastic bag size: 650*450mm

4.2 Inner box with single corrugated size: 540*250*220mm

4.3 Carton with double corrugated size: 570*510*550mm(4PCS/Carton)

4.4 Weight per carton: 18 KG