

Model No.:SC-H120-01


1 Overview

YIPU Model No. SC-H120-01 is one of the main equipment for user access points, applied for protective connection and distribution between two or more cables. The primary function is to connect distribution cable and indoor cable in the open air. It's widely used in communication systems, cable TV, optical cable network systems and others by virtue of steady structure, good sealing performance and easy construction.

2 Technical Index

Model No.	SC-H120-01	Color	Black
Capacity	120 cores	Protection Level	IP68
Material	PC, PC+ABS,ABS	Inlet/outlet	3+3
Dimension(MM)	369*186*146	Sealing Method For Inlets	Screw mechanical
Inlet cable port	Φ14.5, Φ12, Φ9.5	Outlet cable port	Φ14.5, Φ12, Φ9.5

The dimension diagram:(mm)

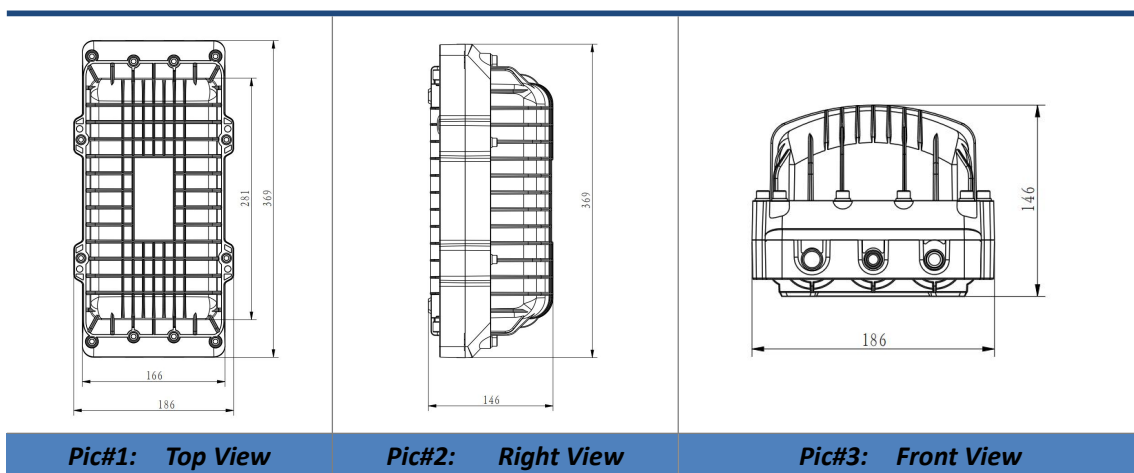


3 Features

- 3.1 The body is made of high quality engineering plastic with good strength;
- 3.2 With good waterproof design, the fiber optical splice closure can be applied into underground and aerial.
- 3.3 Be equipped with 5 splice trays (each capacity is 24 cores) (Pic#4 for details);
- 3.4 Excellent fiber routing design ensures the radius curvature of the fiber well


and enough fiber storage space.

Pictures for reference:


For 3.3



Pic#4



Pic#5



Pic#6

4 Package Information

4.1 Plastic bag size:600*500mm

4.2 Inner box with single corrugated size: 375*190*155m

4.3 Carton with double corrugated size:400*400*495mm(6PCS/Box)

4.4 Weight per carton: 17 KG